



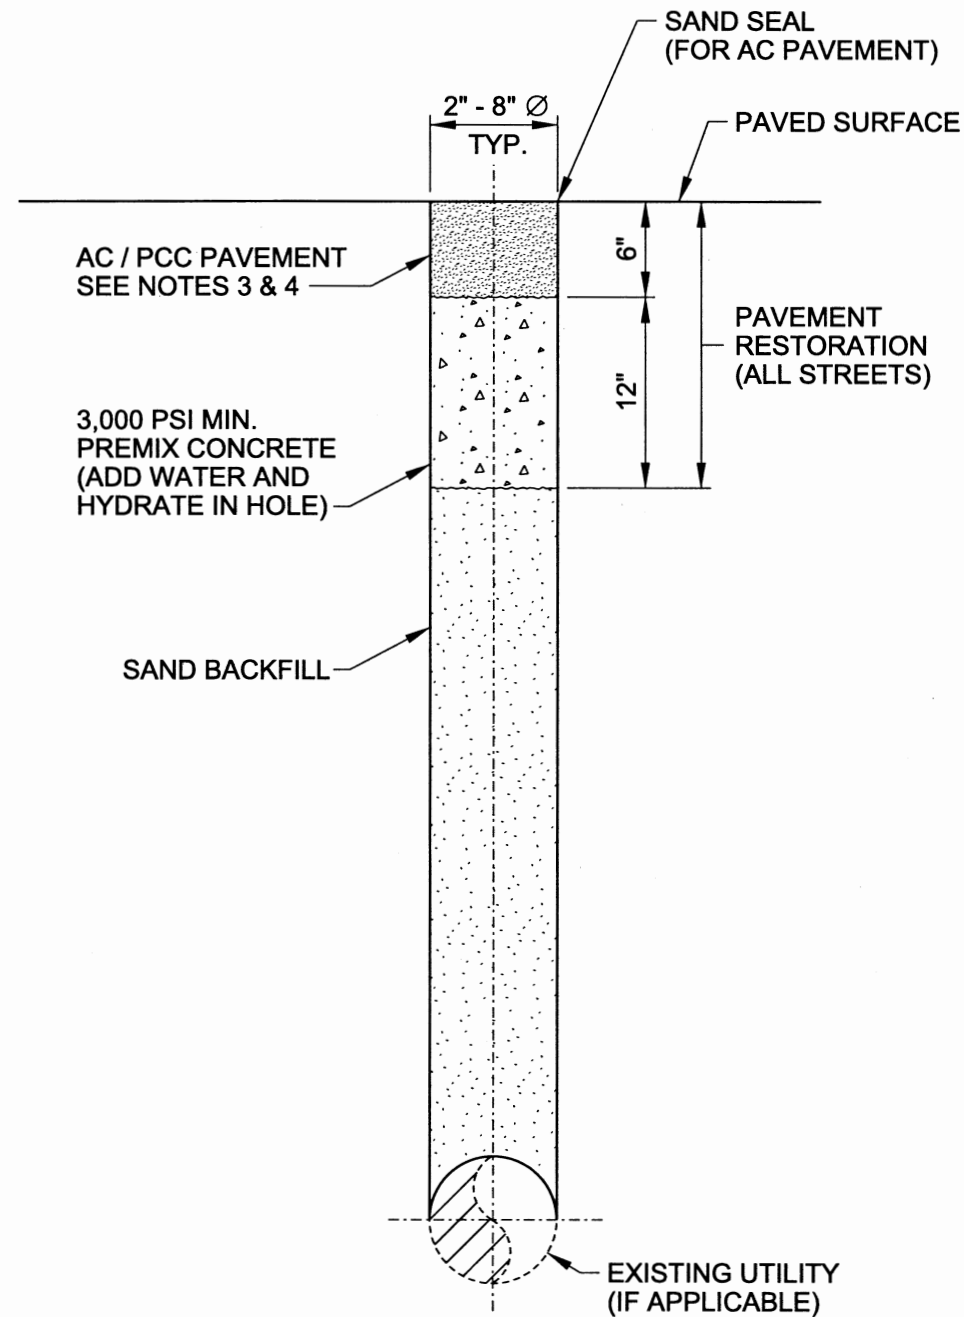

SHALLOW POTHOLES / PAVEMENT CORING

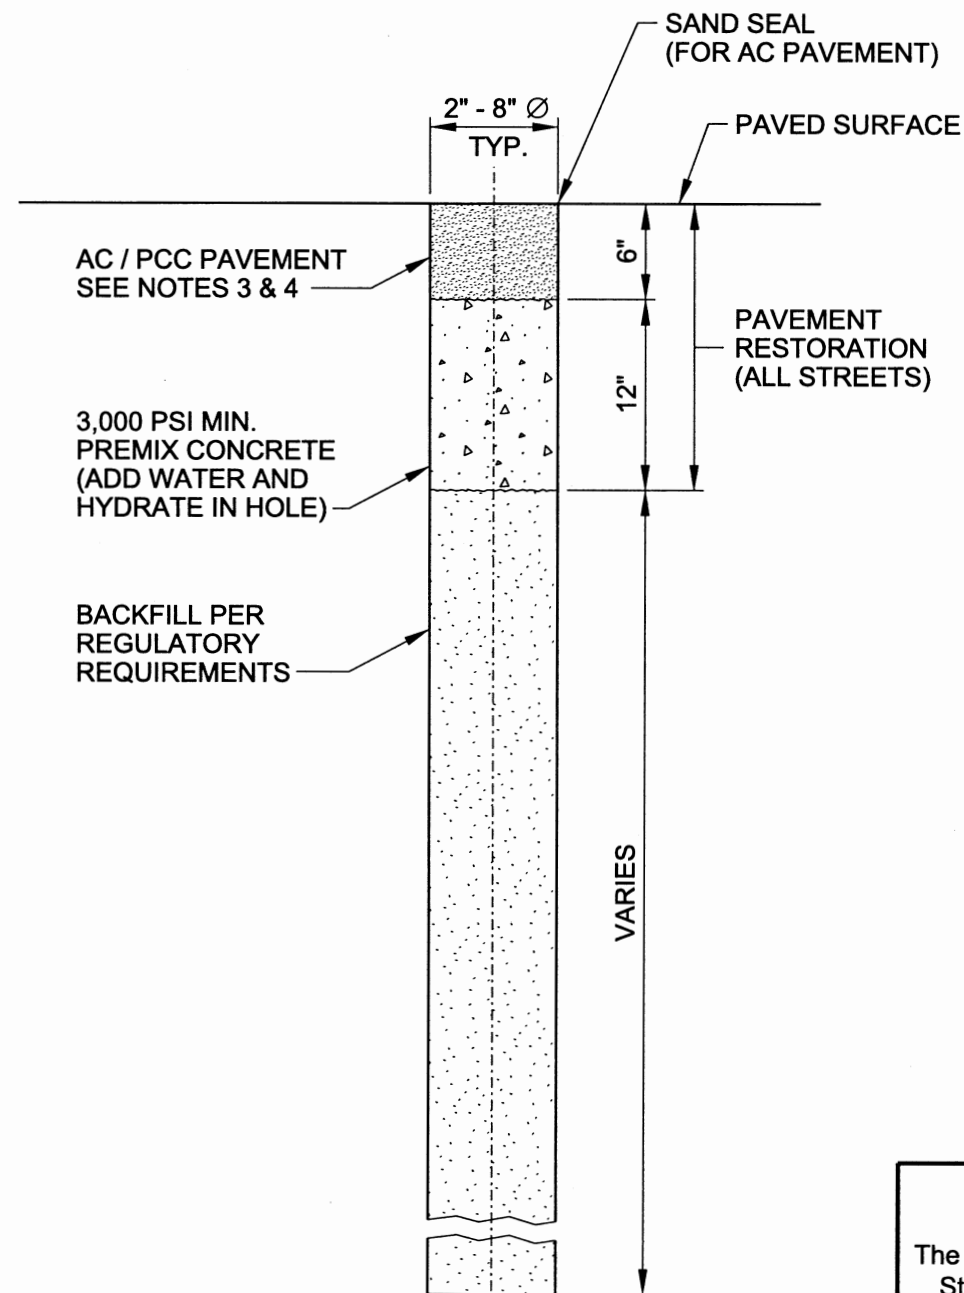

SUBSURFACE INVESTIGATION

NOTES:

1. SEE CONSTRUCTION PRODUCTS LIST (CPL) FOR APPROVED COLD MIX AC PRODUCTS.
2. IF PAVEMENT IS UNDERMINED OR DAMAGED DURING CONSTRUCTION THEN RESTORATION SHALL BE AS DIRECTED.
3. ASPHALT STREETS: HOT MIX OR APPROVED COLD MIX AC PLACED IN 2 EQUAL LIFTS AND COMPACTED WITH PNEUMATIC TAMPER (OR APPROVED EQUIVALENT). SAND SEAL JOINT AT STREET SURFACE.
4. CONCRETE STREETS: 3000 PSI PREMIX OR BATCH PLANT CONCRETE. STRIKE LEVEL WITH EXISTING PAVEMENT.
5. FOLLOW ALL APPLICABLE REGULATORY REQUIREMENTS.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user.

Note:
All material and workmanship shall be in accordance with the City of Portland Standard Construction Specifications.



BUREAU OF TRANSPORTATION
CITY OF PORTLAND, OREGON

City Engineer

Standard Drawing Title

POTHOLE / SUBSURFACE
INVESTIGATION
PAVEMENT RESTORATION

Effective Date: 04-07-14

Calc. Book No.: -

Baseline Report Date: -

Standard Drawing No.

P-509